

Smart Indoor Camera

User Manual



INTO YOUR FUTURE

What's in the box

Consult the checklist below for all components.



Smart
Indoor Camera



Power adapter



USB cable



Bracket



Adhesive tape




Screws



User manual



Pin

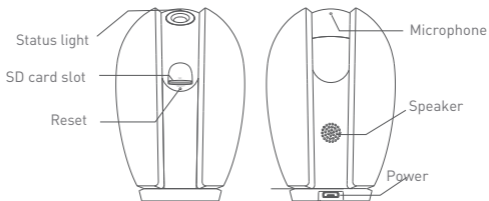


Description


Power	DC5V±10%
Status light	<ul style="list-style-type: none"> • Red light solid on: the camera network is abnormal • Blinking red light: awaiting WiFi connecting • Blue light solid on: camera running correctly • Blinking blue light: currently connecting
Microphone	Captures sounds for your video
SD card slot	Supports local SD Card storage (Max.128G)
Reset	Press and hold for 5 seconds with pin to reset the device(if you have modified settings, they will return to factory defaults)

Install

1. Use the included mounting bracket to fix the camera to a clean surface.

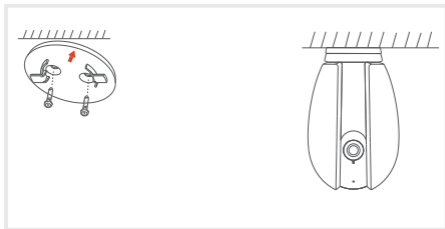

2. Or, stick the camera to an inclined surface with the adhesive tape we provided.

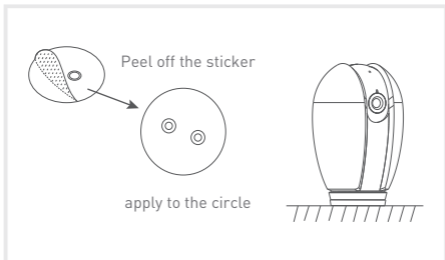

Connect

Download the Tellur Smart App for both iOS and Android OS.
Scan the QR code to download Tellur Smart App

-Support



iOS



Android




Download App(iOS&Android)

Set up router




This device only supports 2.4GHz frequency band router, does not support 5GHz frequency band router, please set the relevant parameters of the router before WiFi configuration, WiFi passwords do not include special characters such as ~!@#\$%^&*(). When the device is configured in WiFi, the mobile phone and device are as close as to the router, which can speed up the configuration of the device.





Adding a New Device

- Turn on power of device being paired and make sure light is flashing quickly.
- Open App and Click "+" to add appropriate device.
- Select WiFi network and input password of WiFi then.
- Once connected the App will prompt the connection, then you can rename the device or just click "done".



- Once App is installed on your device and you have added your smart device to your app you will be able to control it.

QR Code Configuration

Getting started

1. Please follow the instructions and make sure the passwords are inputted correctly.
2. One device can only be added with one App account, if the device has been added with another account already, then it can't be added to any another account again.
3. The device will be unbind from previous account after been deleted from App. Further, the device will be resetted automatically once from blue light to red light.

Process


Step 1.



Open the Tellur Smart App, click "+" or "Add Device".

Step 2.


Select "Smart Camera".

Power the device on and make sure the indicator is flashing quickly or a prompt tone is heard.

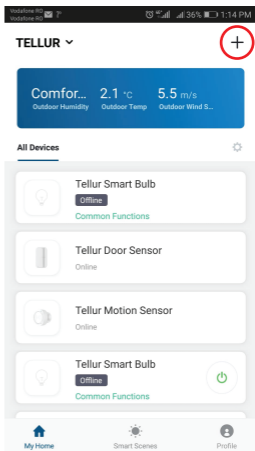




Step 3. Input WiFi passwords and click "Confirm", scan the QR Code with a device. (You can change the network connection)




About 20cm



Step 4. Click "I heard the beep" when the device comes out "dong dong dong". And you can complete the configuration about 30s.

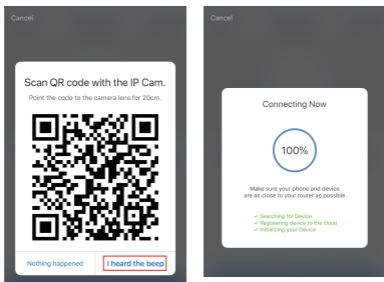

Step 5. The device is added, and the device nickname can also be changed in this interface.

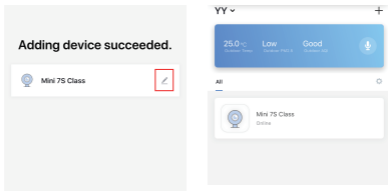

FAQ

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: Why is it still in the list of devices after resetting?

A: The reset device only resets the network configuration of the camera, but cannot change the configuration on the App, remove the camera, and must be deleted by the App.

Q: How to cut the camera network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Functions

Pan/Tilt

Rotate your camera by sliding on your smartphone, providing you with 360 degrees of vision.

Video flip

Flip your video stream up or down for maximum flexibility.

Motion detection

Built-in motion sensors detect movement, and the camera will send you push notifications and app alerts.

Record

Support 24H continuous recording with high capacity SD storage.

Day & Night

Never miss a moment, even in complete darkness, with powerful night-vision technology.



Daytime



Night

Declaration of conformity

We, ABN SYSTEMS INTERNATIONAL S.R.L., Bucharest, Sector 1, Marinariilor street, nr. 31, we declare on own responsibility that the product below:

Product description	Brand	Product code
WiFi Smart Indoor Camera	Tellur	TLL331071

It does not endanger life, health, work safety, does not have a negative impact on the environment and corresponds to the standards stated in the manufacturer's declaration of conformity.

The product is in compliance with the following standards and / or other normative documents:

RED – 2014/53/EU

Applied standards:

EMC: ETSI EN 301 489-1 V2.2.0 (2017-03)

ETSI EN 301 489-17 V3.2.0 (2017-03)

Radio: ETSI EN 300 328 V2.1.1 (2016-11)

Health: EN 62311:2008

Safety: EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

EMC – 2014/30/EU

Applied standards:

EN 50130-4:2011/A1:2014

EN 55032:2015

EN 55024:2010/A1:2015

EN 61000-3-2: 2014

EN 61000-3-3:2013

RoHS – 2011/65/EU

The product bears CE mark, applied in 2019

Name: George Barbu Function: General manager

Place and date: Bucharest, 19-03-2019

Signed:





Disposal and recycling information

The crossed-out wheeled-bin symbol on your product, battery, literature or packaging reminds you that all electronic products and batteries must be taken to separate waste collection points at the end of their working lives; they must not be disposed of in the normal waste stream with household garbage. It is the responsibility of the user to dispose of the equipment using a designated collection point or service for separate recycling of waste electrical and electronic equipment (WEEE) and batteries according to local laws. Proper collection and recycling of your equipment helps ensure EEE waste is recycled in a manner that conserves valuable materials and protects human health and the environment, improper handling, accidental breakage, damage, and/or improper recycling at the end of its life may be harmful for health and environment.

