




# **Paidia Bluetooth Speaker**

## **TLL161091**

### **User Guide**

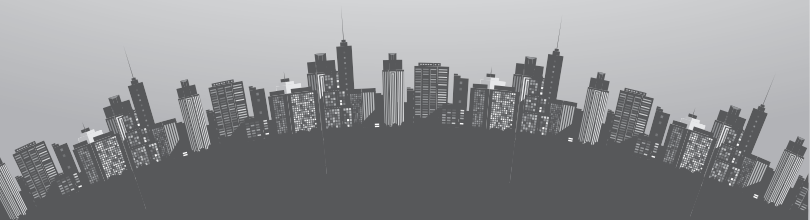

**INTO YOUR FUTURE**

## Introduction

Free yourself from wires with Paidia speaker. No more fumbling with charging cables late at night or knocking things off your bedside table. Paidia features a Qi standard wireless charger to effortlessly recharge your phone simply by placing your phone on the induction charging surface. The multi-function LED alarm clock has incredibly robust sound from the dual 10Watt speaker. Connect your phone via Bluetooth to stream your favorite music or plug in a music player using the auxiliary line-in. Charge 2 USB chargeable devices simultaneously via the Dual USB charging ports.

## Packaging Contents

- Paidia speaker
- EU Power adaptor
- AUX cable
- User Manual

## Specifications

- Bluetooth Version: BK 3.0
- Bluetooth Frequency: 2.4G~2.48G
- Bluetooth Profile: A2DP, AVRCP and HSP
- Power Input: 5V/ 3A
- USB Power Output: 5V 3A (max)
- Speaker Output: 5Wx2
- Impedance: 4  $\Omega$

## Compatibility

Paidia speaker is compatible with Qi Wireless Chargeable Devices.


## Precautions:

Please read all safety instructions and warnings thoroughly before using this product. Improper use of this product may result in damage to this or attached products.

1. Do not disassemble the product or attempt to fix it.
2. Kindly use an original charging cable provided to charge the product.
3. Do not attempt to replace any part of this product or battery inside.
4. Do not crush, puncture, dispose of in fire, short the contacts or expose the product to water or other liquids.
5. Do not store or use the product in a high-temperature environment, including intense sunlight or heat.
6. Avoid drops, bumps, abrasions and impacts.
7. If there is any reason to believe that there is damage to the product, discontinue use immediately.
8. If you find that the product is too hot, is emitting an odor, or is deformed, punctured or exhibits any suspicious or abnormal behavior, discontinue use immediately and contact our customer service.

## Appearance & Interface description

1. Snooze Button
2. Alarm Button
3. Time Button
4. – Button
5. + Button
6. FM Button
7. AUX Button
8. Multifunction Button
9. USB Charging Ports
10. Charge Port
11. AUX Port

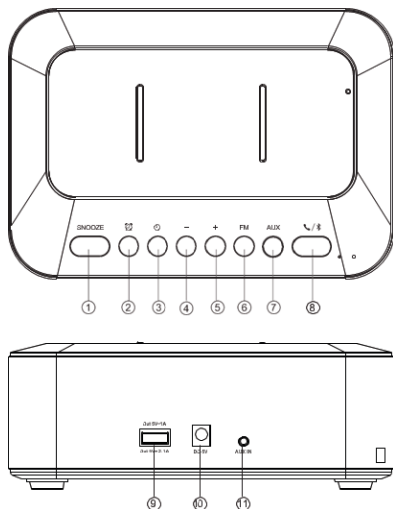

## Operations instructions

1. Set the Time:
  - Short press the Time button to make the hour digits blink.
  - Set hour by pressing – or + button.
  - Short press Time button again to make the minute digits blink.
  - Set minute by pressing – or + button.
  - Short press Time button or wait 15 seconds to show current time.

## 2. Set an Alarm:

- Short press Alarm button to make the hour blink.
- Set hour by pressing – or + button.
- Short press Alarm button again to make the minute blink.
- Set minute by pressing – or + button.
- Short press Alarm button or wait 15 seconds to exit alarm set up and return to current time.

## 3. Snooze

- Press the Snooze button to snooze for 9 minutes.
- When the alarm sounds, press Alarm to cancel snooze.

## 4. Turn on/off alarm

- To turn on the alarm, press and hold the Alarm button for a few seconds until the Alarm icon turns on
- To turn off the alarm, press and hold the Alarm button for a few seconds until the Alarm icon turns on

## 5. AUX Function

- Press AUX button to enter AUX mode
- Insert Line-in cable to AUX socket in the back of speaker to connect external player device or computer.

## 6. Control music Playback

- Press Multifunction button to play/pause the music
- Press – to select decrease volume
- Press + to select increase volume

## 7. Call Management

- While in Bluetooth mode, press Multifunction button to accept a call.
- Press Multifunction button again to hang up the call.
- You only can reject call from your device, not from the speaker.

## 8. NFC Pairing:

- Turn On the NFC function of your device and touch it to Paidia's NFC Sensing Area.
- Your device will ask for permission to pair with Paidia speaker.
- Choose 'YES' to complete pairing.
- After successful pairing, the indicator will change to solid Blue. Control track playback and volume from your connected device

## 9.FM Radio Mode

- Press FM button to enter FM mode.
- Press and hold FM Button for 3 seconds to search and store the FM Stations
- Press – or + to choose radio station
- Press and hold – or + to change volume.
- Press FM Button one more time to exit FM mode

## Disposal and recycling information



The crossed-out wheeled-bin symbol on your product, battery, literature or packaging reminds you that all electronic products and batteries must be taken to separate waste collection points at the end of their working lives; they must not be disposed of in the normal waste stream with household garbage.

It is the responsibility of the user to dispose of the equipment using a designated collection point or service for separate recycling of waste electrical and electronic equipment (WEEE) and batteries according to local laws.

Proper collection and recycling of your equipment helps ensure EEE waste is recycled in a manner that conserves valuable materials and protects human health and the environment, improper handling, accidental breakage, damage, and/or improper recycling at the end of its life may be harmful for health and environment.



### **ABN Systems International**

- Str. Marinariilor, nr.29  
Sector 1, Bucuresti, Romania
- 004.021.233.09.95
- office@tellur.com  
office@abnsystems.ro
- www.tellur.com